

# FEATHERLITE ALUMINUM LADDERS

## Series 3200 Heavy Duty Aluminum Extension

CSA approved Grade 1 - 250lb load rating.  
Meets or exceeds ANSI Type 1 - 250 lb load rating.  
Heavy duty "I" Beam construction, 3<sup>1</sup>/<sub>16</sub>" x 1<sup>1</sup>/<sub>4</sub>" rails provide stability, torque resistance and high strength to weight ratio. Round Rung. For D Rung, add D to part number.

### Two Section Extension

Part No.	Size	Max Ext. Length	Base Section		Fly Section		Approx. Wt.
			O/S Width	I/S Width	O/S Width	I/S Width	
3216	16'	13'	17 <sup>5</sup> / <sub>8</sub> "	15 <sup>1</sup> / <sub>8</sub> "	16 <sup>3</sup> / <sub>8</sub> "	13 <sup>3</sup> / <sub>4</sub> "	29 lbs
3220	20'	17'	17 <sup>5</sup> / <sub>8</sub> "	15 <sup>1</sup> / <sub>8</sub> "	16 <sup>3</sup> / <sub>8</sub> "	13 <sup>3</sup> / <sub>4</sub> "	34 lbs
3224	24'	21'	17 <sup>5</sup> / <sub>8</sub> "	15 <sup>1</sup> / <sub>8</sub> "	16 <sup>3</sup> / <sub>8</sub> "	13 <sup>3</sup> / <sub>4</sub> "	41 lbs
3228	28'	25'	17 <sup>5</sup> / <sub>8</sub> "	15 <sup>1</sup> / <sub>8</sub> "	16 <sup>3</sup> / <sub>8</sub> "	13 <sup>3</sup> / <sub>4</sub> "	50 lbs
3232	32'	29'	17 <sup>3</sup> / <sub>4</sub> "	15 <sup>1</sup> / <sub>4</sub> "	16 <sup>1</sup> / <sub>4</sub> "	13 <sup>3</sup> / <sub>4</sub> "	57 lbs
3236	36'	32'	17 <sup>3</sup> / <sub>4</sub> "	15 <sup>1</sup> / <sub>4</sub> "	16 <sup>1</sup> / <sub>4</sub> "	13 <sup>3</sup> / <sub>4</sub> "	66 lbs
3240	40'	35'	17 <sup>3</sup> / <sub>4</sub> "	15 <sup>1</sup> / <sub>4</sub> "	16 <sup>1</sup> / <sub>4</sub> "	13 <sup>3</sup> / <sub>4</sub> "	73 lbs

## Series 4100 & 4200

### Extra Heavy Duty Aluminum Extension & Straight

CSA approved Grade 1 - 250lb load rating. D Rung except 4360.  
Meets or exceeds ANSI Type 1A -300 lb load rating.  
Our signature product. Possibly the best designed and manufactured ladder in the world.  
Rigid "Box-Section" side rails. Unequaled for strength and durability.

### Two Section Extension

Part No.	Size	Max Ext. Length	Base Section		Fly Section		Approx. Wt.
			O/S Width	I/S Width	O/S Width	I/S Width	
4216	16'	13'	17 <sup>1</sup> / <sub>16</sub> "	15 <sup>1</sup> / <sub>4</sub> "	14 <sup>5</sup> / <sub>8</sub> "	12 <sup>7</sup> / <sub>8</sub> "	28 lbs
4220	20'	17'	17 <sup>1</sup> / <sub>16</sub> "	15 <sup>1</sup> / <sub>4</sub> "	14 <sup>5</sup> / <sub>8</sub> "	12 <sup>7</sup> / <sub>8</sub> "	35 lbs
4224	24'	21'	17 <sup>1</sup> / <sub>16</sub> "	15 <sup>1</sup> / <sub>4</sub> "	14 <sup>5</sup> / <sub>8</sub> "	12 <sup>7</sup> / <sub>8</sub> "	42 lbs
4228	28'	25'	17 <sup>1</sup> / <sub>16</sub> "	15 <sup>1</sup> / <sub>4</sub> "	14 <sup>5</sup> / <sub>8</sub> "	12 <sup>7</sup> / <sub>8</sub> "	47 lbs
4232	32'	29'	17 <sup>1</sup> / <sub>16</sub> "	15 <sup>1</sup> / <sub>4</sub> "	14 <sup>5</sup> / <sub>8</sub> "	12 <sup>7</sup> / <sub>8</sub> "	53 lbs
4236	36'	32'	18 <sup>3</sup> / <sub>8</sub> "	16 <sup>1</sup> / <sub>4</sub> "	15 <sup>7</sup> / <sub>8</sub> "	14"	68 lbs
4240	40'	35'	18 <sup>3</sup> / <sub>8</sub> "	16 <sup>1</sup> / <sub>4</sub> "	15 <sup>7</sup> / <sub>8</sub> "	14"	77 lbs
4244	44'	39'	18 <sup>3</sup> / <sub>8</sub> "	16 <sup>1</sup> / <sub>4</sub> "	15 <sup>7</sup> / <sub>8</sub> "	14"	91 lbs
4360	60'	50'	21 <sup>3</sup> / <sub>4</sub> "	19"	16"	14 <sup>1</sup> / <sub>8</sub> "	128 lbs

### Single Section Straight - Round Rung

Part No.	Size	O/S Width	I/S Width	Weight
4108	8'	14 <sup>5</sup> / <sub>8</sub> "	12 <sup>7</sup> / <sub>8</sub> "	13 lbs
4110	10'	14 <sup>5</sup> / <sub>8</sub> "	12 <sup>7</sup> / <sub>8</sub> "	16 lbs
4112	12'	14 <sup>5</sup> / <sub>8</sub> "	12 <sup>7</sup> / <sub>8</sub> "	19 lbs
4114	14'	14 <sup>5</sup> / <sub>8</sub> "	12 <sup>7</sup> / <sub>8</sub> "	22 lbs
4116	16'	14 <sup>5</sup> / <sub>8</sub> "	12 <sup>7</sup> / <sub>8</sub> "	25 lbs
4118	18'	14 <sup>5</sup> / <sub>8</sub> "	12 <sup>7</sup> / <sub>8</sub> "	28 lbs
4120	20'	14 <sup>5</sup> / <sub>8</sub> "	12 <sup>7</sup> / <sub>8</sub> "	31 lbs
4122	22'	16"	14"	41 lbs
4124	24'	16"	14"	44 lbs

## Series 3700

### Heavy Duty Aluminum Sawhorse Steps

The ideal drywall and general contractor's access tool.

Part No.	Size	Open Height	Base Width	Base Depth	App. Wt.
3702	2'	23"	32"	24 <sup>1</sup> / <sub>2</sub> "	10 lbs
3703	3'	35"	34 <sup>1</sup> / <sub>2</sub> "	32"	14 lbs
3704	4'	47 <sup>1</sup> / <sub>2</sub> "	34 <sup>1</sup> / <sub>2</sub> "	32"	19 lbs


## Series 2700

### Medium Duty Aluminum Multi-Way


CSA Approved Grade 2 - 225 lb load rating.  
Meets or exceeds ANSI Type 2 - 225 lb load rating.  
A tough, versatile ladder for the tradesman or do-it-yourselfer

Part No.	Step Ladder Size	Extension Ladder Size	Max. Ext. Open Length	Approx. Wt.
2706	6'	12'	9'	22 lbs
2707	7'	14'	11'	25 lbs
2708	8'	16'	13'	28 lbs

Series 3200

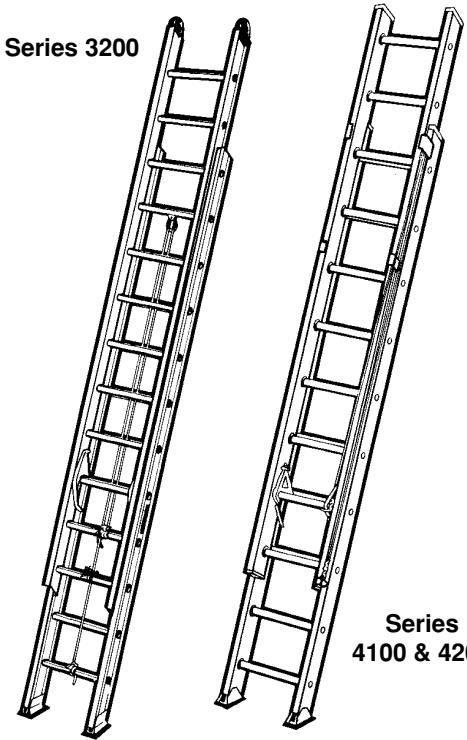

Series 4100 & 4200

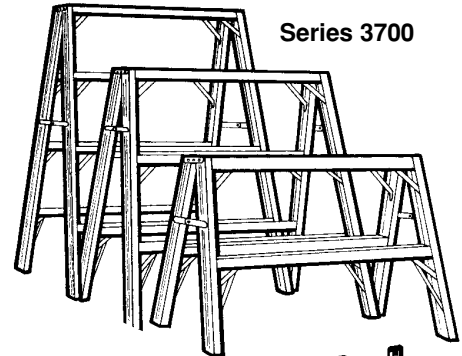

Series 2700

